CLINA 13FF - Data Sheet

esbelt

STRUCTURE

Total Thickness	2.00 mm
Nº of plies	2
Fabric	Polyester
Weft	Rigid
Weight	2.30 kg/m2
Constant Temp. ºC	-15 / 80
Intermittent Temp. ºC	-25 / 100
1 Top cover	
Thickness	0.00 mm
Material	-
Colour	Natural
Surface	Fabric
Hardness	0 ShA
2 Internal cover	
Material	PVC
3 Bottom cover	
Thickness	0.00 mm
Material	-
Colour	Natural
Surface	Fabric
Hardness	0 ShA

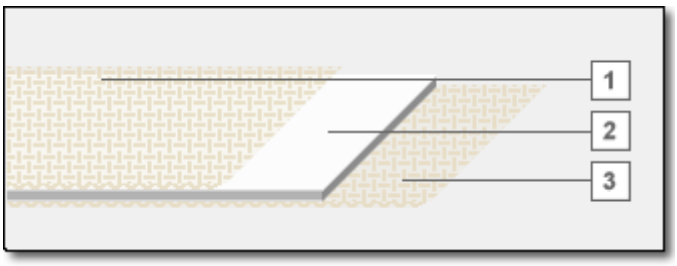

PROFILES APPLICATION

Profiles on top cover	Yes
Profiles on bottom cover	Yes
Runer sidewalls	No

SPECIAL CHARACTERST.

FDA FDA Food
EU EU food (Regulation EU 10/2011)
LF Low friction

TENSIONS N/mm

Breaking load	120
Working load 1% elongation	9
Max. load at 1.5% elong.	12

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed application	No

MIN. DRUM DIAMETER mm



Flexing [F]	40
Back flexing [C]	40

FRICTION COEFF. BOTTOM COVER

On steel Din/Est.	0.16 / 0.23
On wood Din/Est.	0.13 / 0.21
On plastic Din/Est.	0.14 / 0.21

FASTENERS

1D , MR1 , RS-62 , UX1SP

REMARKS

Longitudinal splice	No
Max. manufacturing width	3000 mm
Last Modified	01/04/2014

SPLICING PARAMETERS (Stratified fibreglass sheets, not metal)

Splice	Pressure Kp/cm2	Sup. Temp. ºC	Inf. Temp. ºC	Min time	Top cov. Flomil / Film	Intern. Flomil	Sheet
DE (Recommend)	2.00	175	175	4	-	ITR00	1
DG	2.00	175	175	4	-	ITR00	3

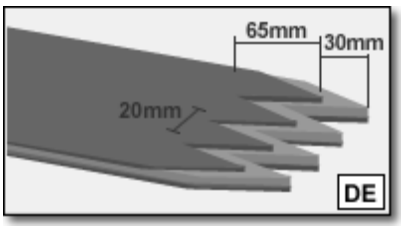

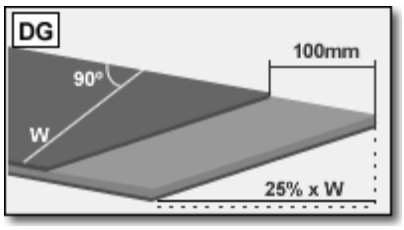

The splice parameters are for orientation only as they depend on the type of press and the thickness of the sheets used. We recommend carrying out a trial run with pieces of the same belt before splicing the belt itself.
Time starts when the press has reached the stated temperature.